


### Dati dimensionali

Tipo	E	F	G	J	P
A 050T	240	107	89	127	40
A 100T	340	107	89	127	40
A 150T	440	107	89	127	40
A 200T	540	107	89	127	40
A 250T	640	107	89	127	40
B 050T	240	132	114	152	52.5
B 100T	340	132	114	152	52.5
B 150T	440	132	114	152	52.5
B 200T	540	132	114	152	52.5
B 250T	640	132	114	152	52.5
C 050T	240	157	139	177	65
C 100T	340	157	139	177	65
C 150T	440	157	139	177	65
C 200T	540	157	139	177	65
C 250T	640	157	139	177	65

Série Normal

Diagramma cicli/minuto

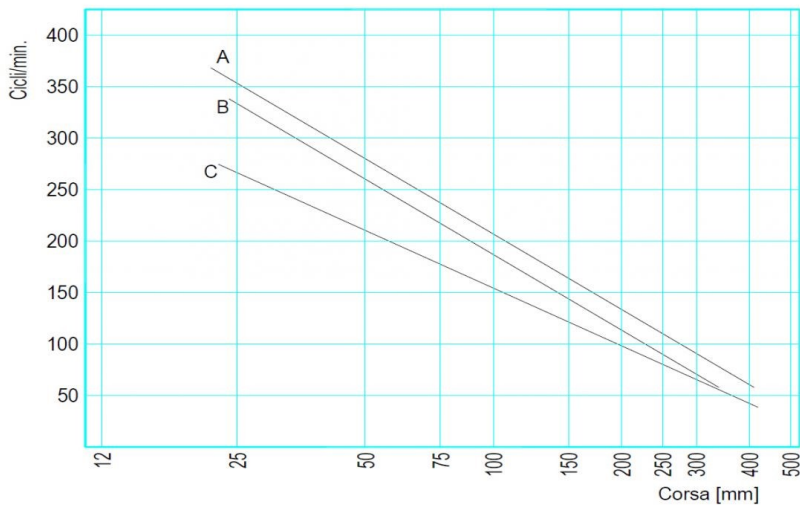

Modelos	Largura máx. chapa [mm]	Curso máx. [mm]	Espessura máx. [mm]	Ciclos min.	Pressão no mordente fixo [kg]	Pressão no mordente móvel [kg]	Força de tração [kg]	Consumo de ar [litros/min.]	Peso [kg]
A050T	50	50	1.30	280	64	120	24	50	3.9
A100T	50	100	1.30	200	64	120	24	71	4.8
A150T	50	150	1.20	160	64	120	24	80	5.7
A200T	50	200	1.10	130	64	120	24	85	6.1
A250T	50	250	1.00	110	64	120	24	90	7.3
B050T	75	50	1.30	260	64	120	24	46	4.8
B100T	75	100	1.30	190	64	120	24	67	5.8
B150T	75	150	1.20	150	64	120	24	78	6.8
B200T	75	200	1.10	110	64	120	24	77	7.8
B250T	75	250	1.00	90	64	120	24	78	8.8
C050T	100	50	1.30	210	64	120	24	37	5.6
C100T	100	100	1.30	160	64	120	24	56	6.6
C150T	100	150	1.20	120	64	120	24	68	7.8
C200T	100	200	1.10	90	64	120	24	63	9.0
C250T	100	250	1.00	80	64	120	24	70	10.1